

LEXAN™ CUSTOM CORRUGATED SHEET

PRODUCT DATASHEET

DESCRIPTION

LEXAN™ Custom Corrugated Sheet – CCA, CCB, CCK, CCT are different range of profiled glazing sheets extruded from Lexan polycarbonate resin. The standard products range are designed for general roof and side glazing applications such as public swimming pools, sports stadia and greenhouses. The complete corrugated sheet range offers high impact strength across a wide temperature range, excellent optical properties, lightweight and good long-term weather resistance.

TYPICAL PROPERTY VALUES ◆

PROPERTY	TEST METHOD	UNITS	VALUE
PHYSICAL			
Density	ISO 1183	g/cm ³	1.20
Water absorption, saturation, 23°C	ISO 62	%	0.35
Moisture Absorption, 23°C / 50% RH	ISO 62	%	0.15
MECHANICAL			
Tensile Stress, yield 50 mm/min	ISO 527	MPa	63
Tensile Strain, yield 50 mm/min	ISO 527	%	6
Tensile Strain, break 50 mm/min	ISO 527	%	120
Tensile modulus 1 mm/min	ISO 527	MPa	2350
Flexural Stress, yield 2 mm/min	ISO 178	MPa	90
Flexural modulus 2 mm/min	ISO 178	MPa	2300
IMPACT			
Izod Impact, unnotched 80*10*3 +23°C	ISO 180/1U	kJ/m ²	NB
Izod Impact, notched 80*10*3 +23°C	ISO 180/1A	kJ/m ²	70
Charpy Impact, notched, 23°C	ISO 179/2C	kJ/m ²	35
THERMAL			
Thermal conductivity	ISO 8302	W/m-°C	0.2
CTE, 23°C to 80°C, flow	ISO 11359-2	1/°C	7x 10 ⁻⁵
Ball Pressure Test, 125°C +/- 2°C	IEC 60695-10-2	-	Pass
Vicat Softening Temp, Rate B/120	ISO 306	°C	145
Relative Temp Index, Elec	UL 746B	°C	130
Relative Temp Index, Mech w/impact	UL 746B	°C	130
Relative Temp Index, Mech w/o impact	UL 746B	°C	130
ELECTRICAL			
Volume resistivity	IEC 60093	Ohm.cm	>10 ¹⁵
Dielectric strength, in oil, 3.2 mm	IEC 60243-1	kV/mm	17

◆ These property values have been derived from LEXAN™ resin data for the material used to produce this sheet product. Variation within normal tolerances are possible for various colors. If minimum certifiable properties are required please contact your local SABIC, Specialty Film & Sheet representative. All values are measured at least after 48 hours storage at 23°C/50% relative humidity. All properties are measured on injection molded samples. All samples are prepared according ISO 294.

™ Trademarks of SABIC.

UV RESISTANCE

The Corrugated sheet range features a proprietary two-side surface protection against the degrading effects of ultra-violet radiation in natural sunlight.

WARRANTY

SABIC offers a limited warranty on all standard Corrugated Sheet products, covering loss of light transmission, loss of impact strength due to weathering within ten (10) years of the date of sale. See warranty for exact details.

FIRE TEST PERFORMANCE

Lexan Corrugated Sheet has good fire performance against many national fire codes dependent on thickness and colour; please check with the local sales office for details.


SITE SAFETY

Despite the high strength of polycarbonates, sensible precautions should be taken when working with Lexan Corrugated Sheets. In particular, crawl boards should be used during installation. Do not walk directly on sheets.


PRODUCT PROFILES

CUSTOM CORRUGATED - CCA, CCB, CCK, CCT


CCA

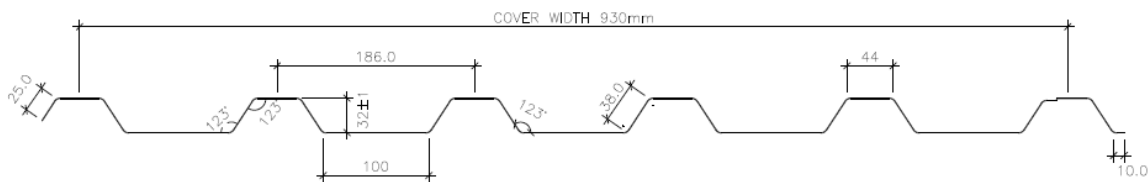


CCB

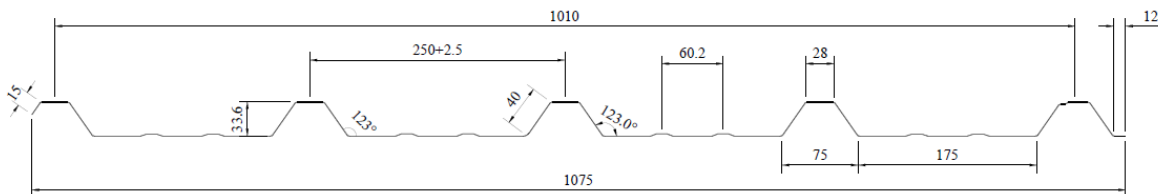

CCK

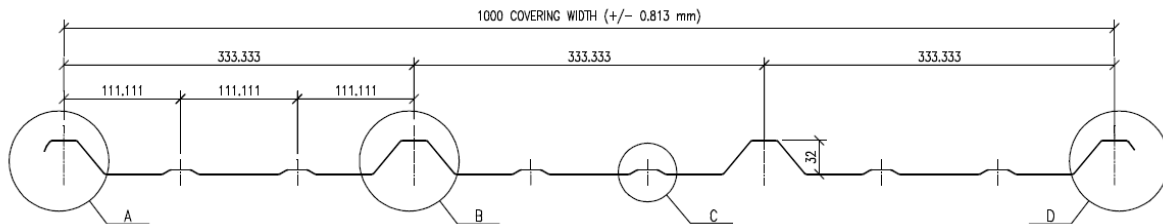

CCT

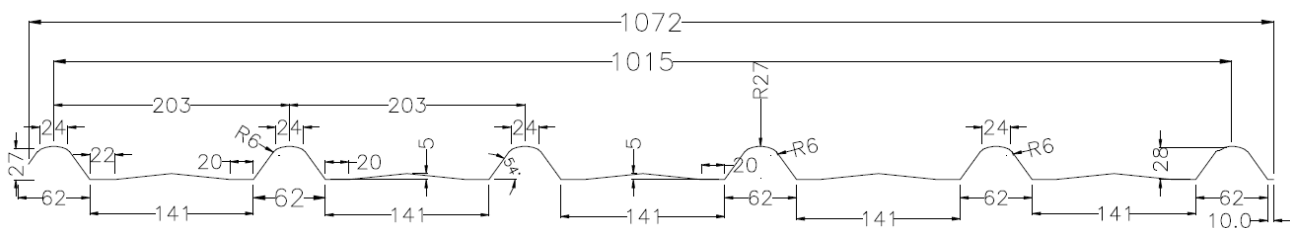

Dimensions in (mm)/Drawing not to scale/All dimensions determined from an unloaded sheet at 25°C.

PRODUCT AVAILABILITY*

LEXAN CUSTOM CORRUGATED profile sheet:

Std. Thin gauge in mm	1.5-2-3
Standard Width in mm	CCA – 1020, CCB – 1070, CCK – 1090 & CCT - 1072
Texture	One side 18N Texture, one side Polish
Standard Colors	Clear code 112 and Bronze code 515081

*LEXAN™ corrugated sheet can be supplied by prior arrangements in non - standard widths, lengths and color. Such arrangements may affect prices, terms and/or other conditions of sales and are subject to minimum order quantities. For more specific details, please refer India Product Guide.

CONTACT US:

SABIC CORPORATE HQ

PO Box 5101
Riyadh 11422
Saudi Arabia
T +966 (0) 1 225 8000
F +966 (0) 1 225 9000
E info@sabic.com

AMERICAS

SABIC
Functional Forms
2500 City West Boulevard
Suite 100
Houston, TX 77042
USA
Toll-free (800) 323 3783
F (888) 443 2033
E spinside.sales@sabic.com

EUROPE

SABIC
Functional Forms
Plasticslaan 1
4612 PX
Bergen op Zoom
The Netherlands
T +31 (0)164 293684
F +31 (0)164 292272
E ff.info@sabic.com

ASIA PACIFIC

SABIC
Functional Forms
2550 Xiupu Road
Pudong
201319 Shanghai
China
T +86 21 3222 4500
F +86 21 6289 8998
E ff.info@sabic.com

INDIA

NORTH REGIONAL OFFICE
10th Floor, Ambiance Corporate
Towers II
Ambiance Island,
Gurgaon 122001,
Haryana, India
T : +91 124 4746100
E info@sabic.com

INDIA

WEST REGIONAL OFFICE
Solitaire Corporate Park
Building 7, 8th Floor, Unit 1
Andheri Ghatkopar Link Road,
Andheri East,
Mumbai 400093, India
T (022) 42481800
F (022) 42481802
E info@sabic.com

INDIA

SOUTH REGIONAL OFFICE
Block B5, Plot No. 81 to 85
Chikkadunnasandra Village,
Anekal Taluk
Off Sarjapura-Attibele State Highway
Bangalore 562125, India
T (91) 80-67725000
F (91) 80-67725007
E info@sabic.com

INDIA

CHENNAI OFFICE
9C EGA Trade Centre
Poonmalle High Road,
Kilpak Chennai 600010, India
T (044) 3026 8274/75/76
F (044) 4285 8905
E info@sabic.com

DISCLAIMER: THE MATERIALS, PRODUCTS AND SERVICES OF SAUDI BASIC INDUSTRIES CORPORATION (SABIC) OR ITS SUBSIDIARIES OR AFFILIATES ("SELLER") ARE SOLD SUBJECT TO SELLER'S STANDARD CONDITIONS OF SALE, WHICH ARE AVAILABLE UPON REQUEST. INFORMATION AND RECOMMENDATIONS CONTAINED IN THIS DOCUMENT ARE GIVEN IN GOOD FAITH. HOWEVER, SELLER MAKES NO EXPRESS OR IMPLIED REPRESENTATION, WARRANTY OR GUARANTEE (i) THAT ANY RESULTS DESCRIBED IN THIS DOCUMENT WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN OR APPLICATION INCORPORATING SELLER'S MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS. UNLESS OTHERWISE PROVIDED IN SELLER'S STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS DESCRIBED IN THIS DOCUMENT. Each user is responsible for making its own determination as to the suitability of Seller's materials, products, services or recommendations for the user's particular use through appropriate end-use and other testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller's Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed by Seller. Statements by Seller concerning a possible use of any material, product, service or design do not, are not intended to, and should not be construed to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of any material, product, service or design in a manner that infringes any patent or other intellectual property right.

SABIC and brands marked with ™ are trademarks of SABIC or its subsidiaries or affiliates, unless otherwise noted.
© 2022 Saudi Basic Industries Corporation (SABIC). All Rights Reserved.

Any brands, products or services of other companies referenced in this document are the trademarks, service marks and/or trade names of their respective holders.

